



**SL RANGE**  
Skid Loaders


# Handling your world

Founded over 60 years ago by the Braud family, the Manitou Group now operates worldwide. A world-leader in all-terrain material handling, the Group designs, manufactures, distributes and services equipment for construction, agriculture and industries.

The Group's product ranges include: all-terrain fixed, rotating and heavy-load telehandlers; all-terrain, semi-industrial and industrial masted forklift trucks; wheel or track skid-steer loaders; articulated loaders; access platforms; truck-mounted forklifts; warehousing equipment; and attachments.

Through its iconic brands - Manitou, Gehl and Mustang by Manitou- and its worldwide network of 1,500 dealers, the Group offers the best solutions to create optimum value for its customers.

Headquartered in France, the Group registered a revenue in 2018 of 1.900 billion euros in 140 countries and employs 4,400 people, all strongly focused on satisfying customers.

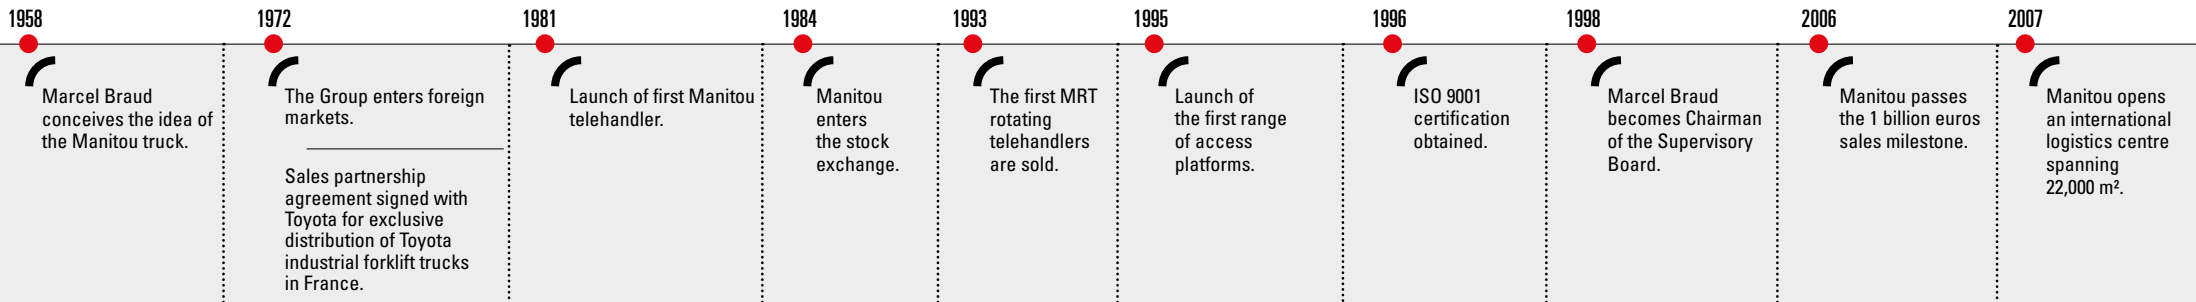

**3 brands**  
distributed by  
1,500 dealers  
in 140 countries



- 27 companies
- 11 production facilities
- 4,400 employees worldwide
- 64% of the share capital held by the founding families
- 78% of revenue comes from foreign markets
- 1.900 billion euros of turnover in 2018 subsidiaries
- 11 production facilities

2008

Takeover of the American company Gehl.

2009

Change of management - return to a Board of Directors.

2010

Launch of Gehl and Mustang articulated loaders.

2012

Crossover agreement signed with Yanmar for the manufacture and distribution of mini-excavators.

2013

Consolidation of Yanmar partnership as Yanmar becomes a Group shareholder with 6.26% of the capital.

2014

January: Michel Denis is appointed President and CEO.  
April: A new roadmap is drawn up focusing on the three divisions, including one for services.

2015

Manitou celebrates the sale of its 500,000<sup>th</sup> machine worldwide.



2016

Launch of the new MLT range, NewAg.



2017

Inauguration of the new entity. Manitou Equipment India, specialising in compact loaders and backhoe loaders.





## **TWO DESIGNS. ENDLESS POSSIBILITIES.**

With twelve models ranging from 386 kg to an industry-leading 1905 kg of operating capacity, Manitou offers both radial-lift and vertical-lift models.

## Radial-lift design

Offers enhanced performance in excavating, grading and digging below grade applications. Due to the radial lift path, the maximum reach is greater at the middle of the lift height.

### Rated operating capacity

Standard: 386 kg - 612 kg  
Counterweight: 533 kg - 680 kg

### Low-profile lift arm

A high-strength, low-profile design maximizes operator visibility for added performance and safety.

### Self-leveling


Hydraulic self-leveling is available as an option.

### Narrow width

A narrow wheel offset option allows entry through a backyard gate.

### Single pin design

Provides superior durability in loading and pushing applications.

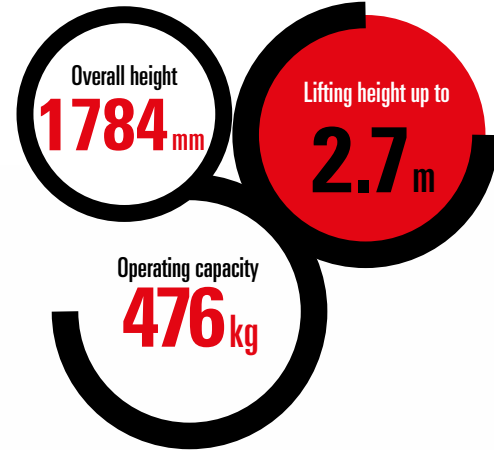

### Durable build

Up to 114 mm width lift arm construction delivers superior strength and rigidity.

# 850 R - 1050 R - 1340 R\*

\*Only available in India

**Excellent forward reach**

The Manitou radial-lift track loaders provide excellent forward reach at the middle of the lift path. This provides high performance for loading flatbed trucks, backfilling or dumping over a wall.

**Level II ROPS/FOPS**

Level II FOPS are standard, which provides added levels of protection for the operator.

**Low profile design**

Low profile design and narrow width make working in small spaces easy.

**Yanmar Tier IV engines**

Yanmar Tier IV 3-cylinder naturally- aspirated engine provides the power you need.

**Easy transport**

With an operating weight of only 1905 kg, the 1050 R can be easily towed on a trailer behind a standard truck.

### Selectable self-leveling

Hydraulic self-leveling with on-off control for the operator is available as an option.

### Rated operating capacity

Standard: 612 kg - 748 kg  
Counterweight: 680 kg - 816 kg

### Level II ROPS/FOPS

Level II FOPS are standard, which provides added levels of protection for the operator.

### Low-profile lift arm

New lift arm increases the width between cylinders for better entry and sight lines.

### Easy access hydraulics

Auxiliary hydraulics mounted on the top of the lift arm for easy access and fast attachment connect and disconnect.



Ground clearance  
**160mm**

Lifting height up to  
**3m**

Capacity up to  
**0.8t**

### Cab-forward design

All-new cab design is mounted forward on the chassis and the seat is mounted higher for exceptional visibility to the front, rear, sides and cutting edge.

# 1350 R - 1500 R - 1650 R





**Durable cylinders**  
Induction-hardened, chrome-plated rods are used for lift and tilt cylinders, providing added durability.

**Excellent forward reach**  
The Manitou radial lift skid loaders provides its forward reach at the middle of the lift path. This provides improved performance for loading flatbed trucks, backfilling or dumping over a wall.



**Digital color display**  
This information center shows real time fuel consumption, engine RPM, machine hours, engine diagnostic codes, warning indicators and much more.

### Selectable self-leveling

Hydraulic self-leveling with on-off control for the operator is available as an option.

### Rated operating capacity

Standard: 862 kg - 1179 kg  
Counterweight: 957 kg - 1261 kg

### Cab-forward design

All-new cab design is mounted forward on the chassis and the seat is mounted higher for exceptional visibility to the front, rear, sides and cutting edge.

### Level II ROPS/FOPS

Level II FOPS are standard, which provides added levels of protection for the operator.

### Radial-piston drive motors

maintenance-free, radial-piston drive motors provide high start-up torque and maximum ground speed up to 20 km/hr for quick acceleration.



Ground clearance from  
**203 mm**

Lifting height up to  
**3.1 m**

Capacity  
**1.2 t**

### Low-profile lift arm

New lift arm increases the width between cylinders for better entry and sight lines.

### Long wheelbase

A long wheelbase provides a smoother ride and a lower center of gravity for added stability.

# **1900 R - 2200 R - 2600 R**

**Durable cylinders**

Induction-hardened, chrome-plated rods are used for lift and tilt cylinders, providing added durability.



● **Between-the-tire**  
Design keeps machine length short and compact. Model 1900 R



● **Over-the-tire**  
Design provides wider access and improved visibility. Models 2200 R and 2600 R



## Vertical-lift design

Providing more reach at full lift height is optimal for applications that require loading and stacking at high heights. By keeping the load closer to the machine, lift capacities are increased over radial-lift models.

### Selectable

self-leveling  
Hydraulic self-leveling with on-off control for the operator is available as an option. Models 2700 V NXT2 & 3300 V NXT2

### Rated operating capacity

Standard: 1225 kg - 1905 kg  
Counterweight: 2700 V only - 1361 kg

Ground clearance from  
**203 mm**

Lifting height up to  
**3.3 m**

Capacity  
**1.4 t**

### Cab-forward design

All-new cab design is mounted forward on the chassis and the seat is mounted higher for exceptional visibility to the front, rear, sides and cutting edge.

### X-type

Upper-rear channel support welded to the top and between the load arms provides added rigidity without obstructing rear visibility.

### Level II ROPS/FOPS

Level II FOPS are standard, which provides added levels of protection for the operator.



# 2700 V - 3300 V - 4200 V

**Fuel efficient**

Equipped with an electronic engine control and electronic hand and foot throttles\*, these models can be operated at partial throttle for lower sound levels and reduced fuel consumption.

**Single plane lift arm**

Design features large diameter pins aligned in a single plane for best-in-class vertical and lateral strength and rigidity.

**"Soft-shift" drive**

Standard two-speed "soft-shift" drive provides smooth transitions between low/high speeds for increased operator comfort.

**Vertical-lift boom**

High-strength, low-profile design increases operator visibility and lifts the load in a nearly vertical path on the 2700 V NXT2, 3300 V NXT2 and 4200 V.

**Smooth operation**

Hydraglide™ ride control system allows the lift arm to "float" when transporting loads, minimizing loss of material, and increased operator comfort.

# COMFORT

## Electronic attachment control option

This factory-installed add-on allows for control of all attachments.



## Visibility

Wide opening in the front of the machine and large screen windows provide high visibility for increased safety and precise load placement.

## Sound reduction material

Suppresses outside noise for a quieter operator environment.

## Operator presence

The machine safety system allows operation only when the user is on the seat and the restraint bar is lowered into position.

## Easy entry and exit

Large entry area allows for easy access to the operator station.



## Excellent views from all sides for safety and precise operation

Excellent visibility to the front, sides and rear of the machine allow for precise placement of loads and reduced jobsite incidents. A high-mounted seat provides an excellent vantage point to the attachment and cutting edge.





### **Precision control**

Standard proportional auxiliary hydraulic control gives the operator the ability to adjust attachment speeds with infinitely adjustable flow control. Available on select models.

Standard auxiliary detent (at full flow) allows the operator to set the hydraulic flow for continuous operation. Available on select models.

### **Adjustable seat Padded Adjustable armrests Adjustable control towers**

Extend and retract to provide personalized comfort.



### **Multiple air vents**

Six adjustable vents throughout the cab provide optimal temperature control.

# VERSATILITY & RENTABILITY

## Tiltable ROPS/FOPS assembly

With gas-spring assist for easy internal access to the pumps, hydraulic valve bank and drive motors.

## Large engine cover

Cover is hinged and positioned by gas-springs to assist lifting and holding in place, and allows for easy return to closed position.

## Front chassis cleanout

Easy cleanout of foot area inside rops/fops.



## Safety restraints

Innovative restraints allows for safe and secure holding of the lift arm and cab while in the maintenance position.

## Swing-out cooler

Provides improved access to engine bay area. Available on select models.

## Swing-out rear door

Rear door easily opens on hinges on right side, allowing full access to filters and fluid reservoirs for servicing and maintenance.



## Get attached

With a wide variety of attachments available, mustang skid steer loaders are easily transformed to meet your customers' needs.

**Pallet forks**



**Rock bucket**



**Trencher**



**Rake**



**Snow removal**



**Auger**



**Stump grinder**



**Rototiller**



**Mower**



**Grapple bucket**



**Grader blade**



**Angle broom**



### All-Tach®

All models feature the easy-to-use all-tach® (universal-style) attachment mounting system compatible with most allied attachments.

#### Single lever design

For simplicity and strength.

**Heavy duty mounting plate** design for increased rigidity over tube style.



### Power-a-Tach®

Hydraulic power-a-tach® all-weather system option allows users to quickly install and remove attachments. An operator leaves the seat only to connect auxiliary hydraulics. This system is compatible with most allied attachments.



**MANITOU**

**1650 R**



## **TO EACH HIS OWN... STYLE**

To provide you with an operational machine year-round, Manitou offers a wide range of products and service that are suited to all your needs.



**Radial-lift**



**850 R**

Transmission - Hydrostatic		•
Power -	HP (kW)	24 (17.9)
Rated operating Capacity	kg (lbs.)	386 (850)
Lift height - Fully raised	m (ft. in.)	2.43 (6'6")
Max. outreach	m (ft. in.)	.376 (1'2")
Ground speed	km/h (mph)	--
Operating Weight	kg (lbs.)	1352 (2980)
Dimensions without attachments LxWxH	m (ft.in.)	1.90x0.90x1.89 (3'3"x2'11"x6'2")
Unladen weight	kg (lbs.)	1279 (2820)



**1050 R**

**1340 R\***



**1350 R**

**1500 R**

**1650 R**

	•
HP (kW)	34.7 (25.5)
kg (lbs.)	476 (1,050)
m (ft. in.)	2.73 (8'11")
m (ft. in.)	0.641 (2'1")
km/h (mph)	8.26 (5.1)
kg (lbs.)	1905 (4200)
m (ft.in.)	2.24x1.22x1.78 (7'4"x4'0"x5'10")
kg (lbs.)	1594 (3515)

	•
HP (kW)	49.3 (36.8)
kg (lbs.)	612 (1,350)
m (ft. in.)	2.78 (9'10")
m (ft. in.)	0.577 (1'10")
km/h (mph)	12.9 (8)
kg (lbs.)	2327 (5130)
m (ft.in.)	2.34x1.33x1.90 (7'8"x4'4"x6'2")
kg (lbs.)	2073 (4570)

	•
Transmission - Hydrostatic	
Power	HP (kW) 49.3 (36.8)
Rated operating Capacity	kg (lbs.) 612 (1,350)
Lift height - Fully raised	m (ft. in.) 2.78 (9'10")
Max. outreach	m (ft. in.) 0.577 (1'10")
Ground speed	km/h (mph) 12.9 (8)
Operating Weight	kg (lbs.) 2327 (5130)
Dimensions without attachments LxWxH	m (ft.in.) 2.34x1.33x1.90 (7'8"x4'4"x6'2")
Unladen weight	kg (lbs.) 2073 (4570)

	•
HP (kW)	49.3 (36.8)
kg (lbs.)	680 (1,500)
m (ft. in.)	3.02 (9'10")
m (ft. in.)	0.579 (1'10")
km/h (mph)	11.9 (7.4)
kg (lbs.)	2690 (5930)
m (ft.in.)	2.38x1.60x1.94 (7'9"x5'3"x6'.4")
kg (lbs.)	2422 (5340)

	•
HP (kW)	69.3 (54.3)
kg (lbs.)	748 (1,650)
m (ft. in.)	3.02 (9'10")
m (ft. in.)	0.579 (1'10")
km/h (mph)	19.5 (12.1)
kg (lbs.)	2796 (6165)
m (ft.in.)	2.38x1.60x1.94 (7'9"x5'3"x6'.4")
kg (lbs.)	2529 (5575)

\*Only available in India



**1900 R**

**2200 R**

**2600 R**

Transmission - Hydrostatic		•
Power	HP (kW)	69.3 (51.7)
Rated operating Capacity	kg (lbs.)	862 (1,900)
Lift height - Fully raised	m (ft. in.)	3.06 (10'0")
Max. outreach	m (ft. in.)	0.572 (1'10")
Ground speed	km/h (mph)	20.1 (12.5)
Operating Weight	kg (lbs.)	3121 (6880)
Dimensions without attachments LxWxH	m (ft.in.)	2.38x1.63x2.03 (7'9"x5'4"x6'7")
Unladen weight	kg (lbs.)	2835 (6250)

		•
Power	HP (kW)	72 (53.7)
Rated operating Capacity	kg (lbs.)	998 (2,200)
Lift height - Fully raised	m (ft. in.)	3.12 (10'2")
Max. outreach	m (ft. in.)	0.686 (2'3")
Ground speed	km/h (mph)	19.2 (11.9)
Operating Weight	kg (lbs.)	3620 (7980)
Dimensions without attachments LxWxH	m (ft.in.)	2.66x1.66x2.05 (6'6"x5'5"x6'8")
Unladen weight	kg (lbs.)	3289 (7250)

		•
Power	HP (kW)	72 (53.7)
Rated operating Capacity	kg (lbs.)	1179 (2,600)
Lift height - Fully raised	m (ft. in.)	3.12 (10'2")
Max. outreach	m (ft. in.)	0.686 (2'3")
Ground speed	km/h (mph)	19.2 (11.9)
Operating Weight	kg (lbs.)	3719 (8200)
Dimensions without attachments LxWxH	m (ft.in.)	2.83x1.66x2.05 (9'3"x5'5"x6'8")
Unladen weight	kg (lbs.)	3402 (7250)





**2700 V**

**3300 V**


**4200 V**

Transmission - Hydrostatic		•
Power	HP (kW)	72 (53.7)
Rated operating Capacity	kg (lbs.)	1225 (2.700)
Lift height - Fully raised	m (ft. in.)	3.31 (10')
Max. outreach	m (ft. in.)	0.812 (2'8")
Ground speed	km/h (mph)	19.2 (11.9)
Operating Weight	kg (lbs.)	3697 (8150)
Dimensions without attachments LxWxH	m (ft.in.)	2.95x1.76x2.05 (9'8"x5'9".5x6'8")
Unladen weight	kg (lbs.)	3379 (7450)

		•
Power	HP (kW)	72 (53.7)
Rated operating Capacity	kg (lbs.)	1497 (3.300)
Lift height - Fully raised	m (ft. in.)	3.33 (10'92")
Max. outreach	m (ft. in.)	0.812 (2'8")
Ground speed	km/h (mph)	19.6 (12.2)
Operating Weight	kg (lbs.)	4123 (9090)
Dimensions without attachments LxWxH	m (ft.in.)	3.02x1.82x2.08 (9'10"x5'11"x6'9")
Unladen weight	kg (lbs.)	3379 (7450)

		•
Power	HP (kW)	120.7 (90)
Rated operating Capacity	kg (lbs.)	1905 (4.200)
Lift height - Fully raised	m (ft. in.)	3.65 (11'11")
Max. outreach	m (ft. in.)	965 (3'2")
Ground speed	km/h (mph)	18.7 (11.6)
Operating Weight	kg (lbs.)	5291 (11664)
Dimensions without attachments LxWxH	m (ft.in.)	3.12x2.05x2.08 (10'2"x6'8"x6'9")
Unladen weight	kg (lbs.)	4838 (10665)



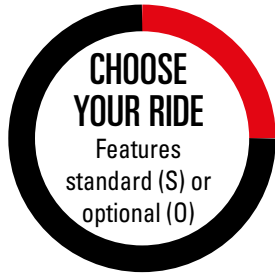

A high-back, five-way adjustable seat comes as standard. Optional air-ride suspension seat or mechanical suspension seat provide enhanced comfort.



Dual-hand/joystick



Hands-only



Hand/foot

	850 R	1050 R	1340 R	1350 R	1500 R	1650 R	1900 R	2200 R	2600 R	2700 V
<b>CONTROLS</b>										
Hands-Only	S	S	O	O	O	O				
Dual-Hand Controls							O	O	O	O
Hand/Foot Controls		S	O	O	O	O	O	O	O	O
Joystick Controls						O	O	O	O	O
<b>ENGINE</b>										
Engine Auto-Shutdown System			S	S	S	S	S	S	S	S
Engine Block Heater	O	S	O	O	O	O	O	O	O	O
Turbo-Charged Engine								S	S	S
Swing-out Cooler			S	S	S	S				
<b>HYDRAULICS</b>										
Auxiliary Hydraulics	S	S	S	S	S	S	S	S	S	S
High-Flow Auxiliary Hydraulics						O	O	O	O	O
<b>OPERATOR STATION</b>										
Adjustable Arm Rests / Control Towers 1							S	S	S	S
Heating	O	O	O	O	O	O	O	O	O	O
Air Conditioning							O	O	O	O
High-Back Adjustable Seat	S	S	S	S	S	S	S	S	S	S
Suspension Seat - Mechanical	O	O	O	O	O	O	O	O	O	O
Suspension Seat - Air Ride			O	O	O	O	O	O	O	O
Cab Enclosure	O	O	O	O	O	O	O	O	O	O
Foot and Hand Throttles 2	S	S	S	S	S	S	S	S	S	S
Full Instrumentation		S	S	S	S	S	S	S	S	S
Horn	O	O	O	S	S	S	S	S	S	S
Integral Access Plate (removable)	S	S	S	S	S	S	S	S	S	S
Operator Restraint Bar	S	S	S	S	S	S	S	S	S	S
ROPS/FOPS Level II Overhead Guard	S	S	S	S	S	S	S	S	S	S
Sound Reduction Material		S	O	S	S	S	S	S	S	S
Work Lights - Front and Rear	S	S	S	S	S	S	S	S	S	S
Road Homologation 4	O		O	O	O	O	O	O	O	O



3300 V	4200 V		850 R	1050 R	1340 R	1350 R	1500 R	1650 R	1900 R	2200 R	2600 R	2700 V	3300 V	4200 V
		<b>PERFORMANCE</b>												
		All-Tach® Attachment Mounting System	S	S	S	S	S	S	S	S	S	S	S	S
0		Power-A-Tach® Attachment Mounting System			0	0	0	0	0	0	0	0	0	S
0		Anti-Vandalism Protection	S	S	S	S	S	S	S	S	S	S	S	S
0	S	Back-Up Alarm	0	0	0	0	0	0	0	0	0	0	0	S
		Brake Control (Auto / Manual)	S	S	S	S	S	S	S	S	S	S	S	S
S	S	Counterweight		0	0	0	0	0	0	0	0	0	S	
0	S	Hydraglide™ Ride Control 3					0	0	0	0	0	S	S	S
S	S	Hydraloc™ Safety System	S	S	S	S	S	S	S	S	S	S	S	S
	S	Hydrostatic Drive	S	S	S	S	S	S	S	S	S	S	S	S
		Lift Arm Support Device	S	S	S	S	S	S	S	S	S	S	S	S
S	S	Switchable Self-Leveling Hydraulic Lift Action	0	0	0	0	0	0	0	0	0	0	0	S
0	S	Two-Speed Drive						0	0	0	0	0	S	S
S	S													
0	S													
0	S													
S	S													
0	S													
0	0													
S	S													
S	S													
S	S													
S	S													
S	S													
0	S													



**Climate control**  
Heat is standard on all cab models. Air conditioning is an option on select models.



**Radio option**  
Factory installed, this radio option customizes your cab.



**Digital color display**  
This information center shows real time fuel consumption, engine rpm, machine hours, engine diagnostic codes, warning indicators and much more. Models 1350 R, 1500 R & 1650 R

**Pressurized cab**  
An optional pressurized, sealed cab enclosure provides a cleaner, quieter operating environment.



## L'expertise et le service au quotidien

Votre concessionnaire Manitou vous garantit une gamme complète de services à toutes les étapes de la vie de votre machine. Il vous accompagnera et s'adaptera à vos besoins pour offrir la meilleure solution à votre besoin.

## 1 400 concessionnaires à votre service

Le réseau Manitou est présent dans plus de **140 pays**. Au total, ce sont plus de **2 000 techniciens experts**, spécialement formés à nos technologies, qui sont à votre service, de l'achat jusqu'à l'après-vente.



- **Réseau de concessionnaires**  
 Un réseau d'experts à votre service quelle que soit votre activité (agriculture, construction, industries).
- **Contrats de maintenance**  
 3 niveaux de contrats qui s'adaptent à vos besoins : **Initial, Advanced, Excellence.**  
 Confiez l'entretien de votre matériel à votre concessionnaire.
- **Financement**  
 Louer ou acheter ? **Manitou Finance** vous aide à choisir la solution de financement la mieux adaptée à votre activité. Pourquoi chercher ailleurs ?
- **Extension de garantie**  
 Avec **Maniplus**, vous prolongez la couverture de votre Manitou jusqu'à 5 ans. Utilisez votre matériel l'esprit tranquille.
- **La solution connectée**  
**Easy Manager** est un outil simple et flexible pour gérer, optimiser et sécuriser le suivi opérationnel de vos machines.
- **Occasion**  
 Vous cherchez un matériel d'occasion ?  
 Le réseau Manitou vous accompagne.  
**Rendez-vous sur [used.manitou.com](http://used.manitou.com)**, le site de référence des occasions Manitou.
- **Pièces de rechange d'origine**  
 Avec plus de 70 000 références disponibles, votre concessionnaire Manitou c'est... l'expertise et le service au quotidien !

Votre concessionnaire :



Siège social  
B.P. 249 - 430 rue de l'Aubinière - 44158 Ancenis Cedex - France  
Tél.: 00 33 (0)2 40 09 10 11 - Fax: 00 33 (0)2 40 09 10 97



Cette publication présente le descriptif des versions et possibilités de configuration des produits Manitou qui peuvent différer en équipement. Les équipements présentés dans cette brochure peuvent être de série, en option, ou non disponibles suivant les versions. Manitou se réserve le droit, à tout moment et sans préavis, de modifier les spécifications décrites et représentées. Les spécifications portées n'engagent pas le constructeur. Pour plus de détails, contactez votre concessionnaire Manitou. Document non contractuel. Présentation des produits non contractuelle. Liste des spécifications non exhaustive. Les logos ainsi que l'identité visuelle de l'entreprise sont la propriété de Manitou et ne peuvent être utilisés sans autorisation. Tous droits réservés. Les photos et schémas contenus dans la présente brochure ne sont fournis qu'à des fins de consultation et à titre indicatif. Manitou BF SA - Société anonyme à conseil d'administration - Capital social : 39 668 399 euros - 857 802 508 RCS Nantes